


Verticale Vertical	Materiale Material	Pompa Pump	kW	Alimentazione (*) Feeding (*)	Giri/min. RPM	Portata max (l/min) Capacity max (l/min)	Prevalenza max (m) Head max (m)
GDV-IJ	Inox St. Steel	1	0.6	24V	2700	50 + 50	38
		2	0.6	24V	2700		38
		1	0.7	230V - 50Hz	2800	60 + 60	48
		2	0.7	230V - 50Hz	2800		48
		1	0.7	230/400V - 50Hz	2800	60 + 60	48
		2	0.7	230/400V - 50Hz	2800		48
		1	0.7	24V	2700	50 + 60	38
		2	0.7	230V - 50Hz	2800		48
GDV-IJMG	Inox St. Steel	1	0.75	24V	2800	90 + 90	50
		2	0.75	24V	2800		50
		1	1.0	230V - 50Hz	2800	100 + 100	60
		2	1.0	230V - 50Hz	2800		60
		1	1.0	230/400V - 50Hz	2800	100 + 100	60
		2	1.0	230/400V - 50Hz	2800		60
		1	0.75	24V	2800	90 + 100	50
		2	1.0	230V - 50Hz	2800		60
		1	0.75	24V	2800	90 + 100	50
		2	1.0	230/400V - 50Hz	2800		60

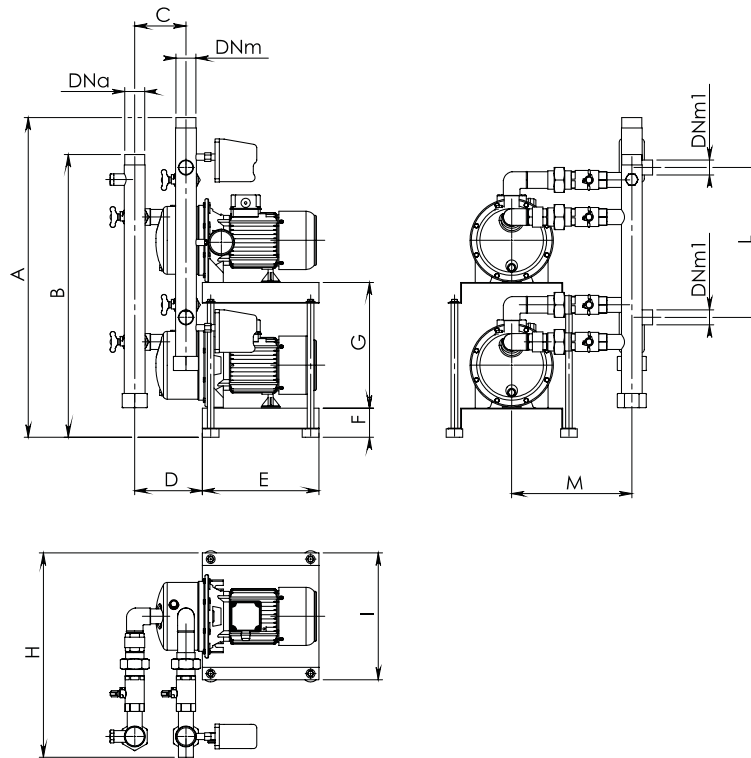

NB: versione standard del gruppo. Su richiesta possiamo modificare l'esecuzione per variare le dimensioni di ingombro.  
NB: standard arrangement of the group. Under request we can change the arrangement to modified the overall dimensions.

Modello Type	Dna (Gas-BSP)	Dnm (Gas-BSP)	Dnm 1 (Gas-BSP)	A	B	C	D	E	F	G	H	I	L	M	Peso / Weight (Kg)		
															DC-DC	AC-AC	AC-DC
<b>GDV-IJ</b>	1"1/2	1"1/2	1"	750	670	120	150	280	70	380	434	320	370	240	38	34	36
<b>GDV-IJMG</b>	1"1/2	1"1/2	1"	750	670	160	195	280	70	380	434	320	370	240	48	43	45