



EP MICRO 3/8" F



**EP MINI 3/4"
EP MIDEX 1"1/4**





**EP MINOR 40
EP MAJOR 60
EP MAXI 80**



Tipo Type	Motore * Motor *	kW	Velocità Speed	Giri/min RPM	H = Prevalenza (metri) / Head (meters)									
					0	4	8	12	16	18	24	27	30	32
EP MICRO 3/8" F	MF - TF	0.10-0.12	1	900	480	430	390	340	280	250	120	0		
	MF	0.25	1	1400	720	680	640	600	540	500	380	270	150	0
	TF	0.18	1	1400	720	680	640	600	540	500	380	270	150	0
	CC MP 12V	0.18/19A	1	1400	720	680	640	600	540	500	380	270	150	0
	CC MP 24V	0.18/10A	1	1400	720	680	640	600	540	500	380	270	150	0
EP MINI 3/4"	MF - TF	0.37	1	900	1000	900	840	720	540	450	0			
	MF - TF	0.56	1	1400	1620	1440	1320	1140	1020	900	600	400	180	0
	CC MP 12V	0.3/30A	1	1400	1620	1440	1320	1140	1020	900	600	400	180	0
	CC MP 24V	0.3/16A	1	1400	1620	1440	1320	1140	1020	900	600	400	180	0
EP MIDEX 1"1/4	MF - TF	0.56	1	900	3840	3480	3180	2760	2160	1800	720	0		
	MF - TF	0.75	1	1400	5760	5160	4800	4320	3600	3180	1920	1200	0	
	TF	0.56	2	1400	5760	5160	4800	4320	3600	3180	1920	1200	0	
	TF	0.37	2	700	2880	2600	2300	1900	1400	1100	0			
	CC MP 12V	0.5/55A	1	1100	4800	4400	3980	3450	2800	2400	1100	0		
EP MINOR 40	MF - TF	1.5	1	900	6900	6200	5760	5040	4200	3660	1800	0		
	TF	1.5	1	1400	10000	9000	8000	6900	5500	4900	2600	1700	0	
	TF	2.1	2	1400	10000	9000	8000	6900	5500	4900	2600	1700	0	
	TF	1.2	2	900	6900	6200	5760	5040	4200	3660	1800	0		
EP MAJOR 60	TF	1.5	1	700	18000	15000	12000	8400	2500	0				
	TF	1.87	1	900	22500	19560	15000	11220	3000	0				
EP MAXI 80	TF	3.3	1	470	36000	34200	30000	24000	12000	0				
	TF	3.5	1	600	43800	41400	36000	30000	16000	0				

Q = Portata (litri/ora) / Capacity (liters/hour)



* MF = monofase / single-phase - TF = trifase / three-phase - CC MP = corrente continua a magneti permanenti / permanent magnet direct current

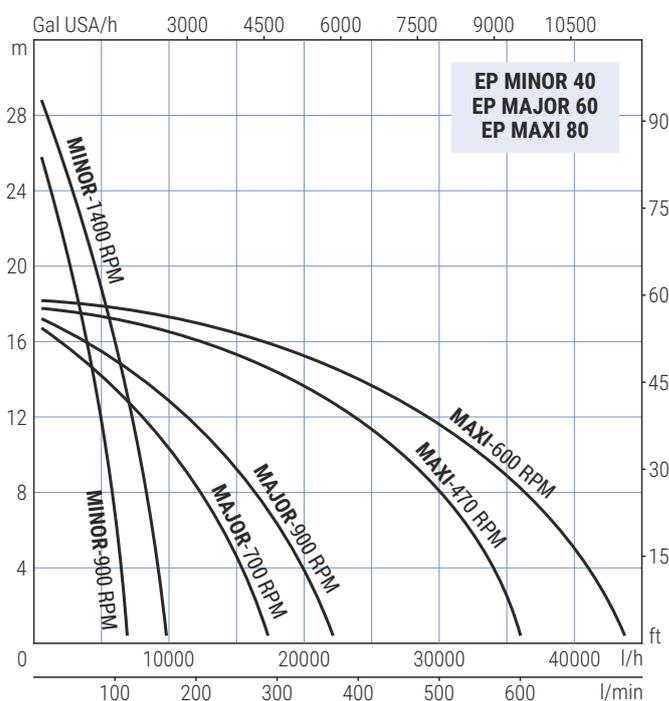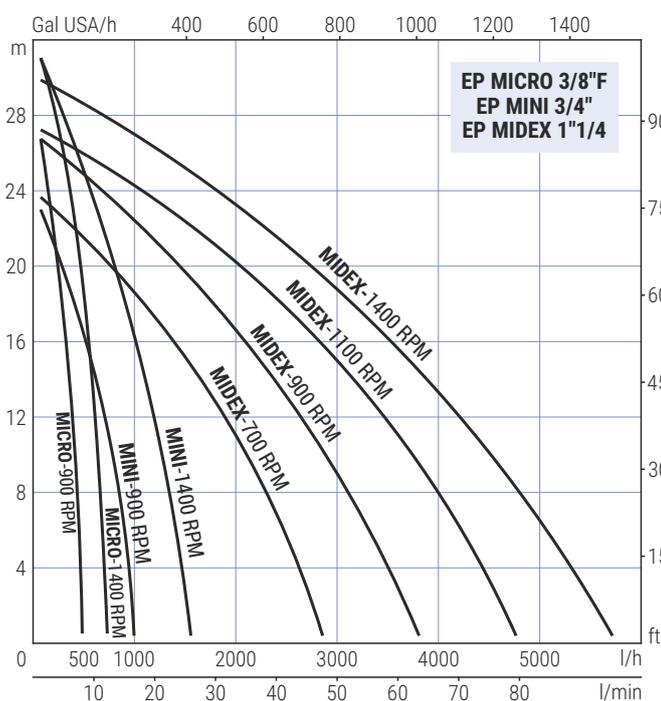



Posizione
Position
V

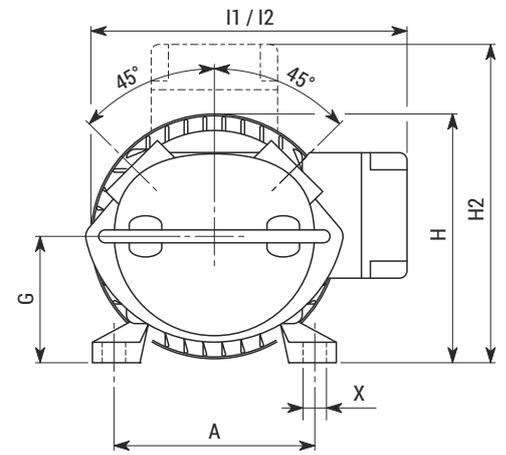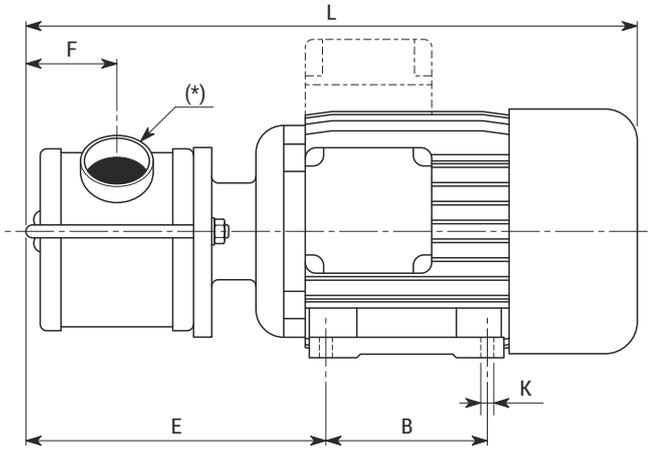

Posizione
Position
90D

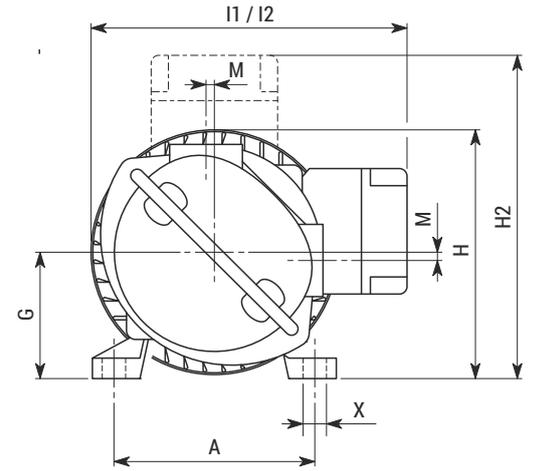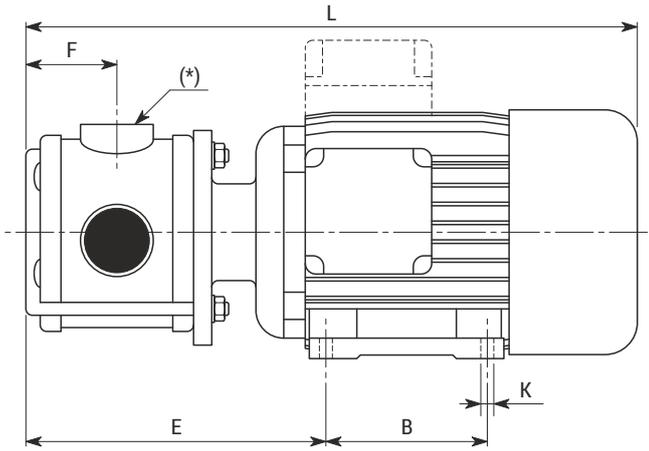

Posizione
Position
90S

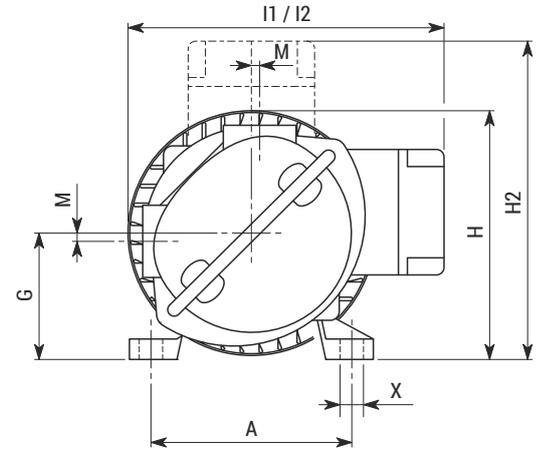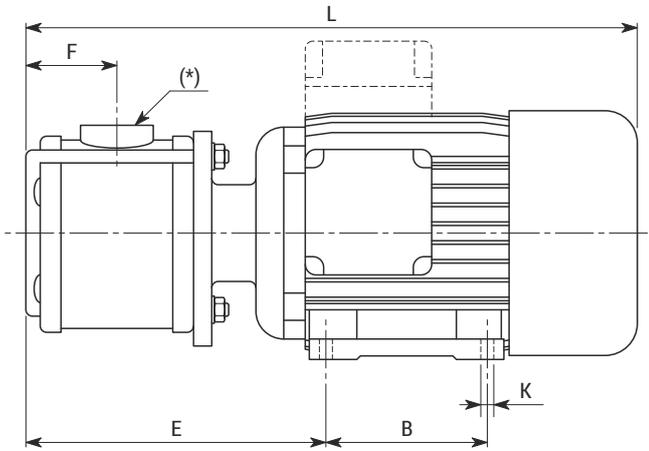

Tipo Type	Motore Motor	Peso Weight	Velocità Speed	Dimensioni (mm) / Dimensions (mm)												
				A	B	E	F	G	H	H2**	I1 **	I2 **	L	M	K	X
EP MICRO 3/8" F	M63	7÷8 kg	1	100	80	124	19	63	-	165	-	125	281	4	7	12
	M63 - MP	7÷8 kg	1	100	80	126	19	63	122	-	-	-	295	4	7	7
EP MINI 3/4"	M71	9÷10 kg	1	112	90	106	26	71	140	179	179	210	276	0	7	12
	M71 - MP	9÷10 kg	1	112	90	113	26	71	140	175	-	-	280	0	7	12
EP MIDEX 1"1/4	M80	15 kg	1	125	100	148	38	80	159	203	203	227	338	7	8	16
	M80	15 kg	2	125	100	148	38	80	159	203	203	227	338	7	8	16
	M80 - MP	15 kg	1	125	100	153	38	80	156	184	-	-	365	7	8	12
EP MINOR 40	M90	20 kg	1	140	125	198	60	90	180	221	221	245	420	4.5	10	16
	M100	27 kg	2	160	140	210	60	100	198	-	-	270	455	4.5	12	21
EP MAJOR 60	M100	31 kg	1	160	140	253	70	100	198	250	250	275	490	6.5	12	21
EP MAXI 80	M132	68 kg	1	216	178	312	90	132	261	325	325	-	630	13	12	22

* raccordi disponibili p.22 / available pipe fittings p.22

H2** = motore con morsetteria superiore / motor with upper terminal box

** I1 = motore con morsetteria laterale / motor with side terminal board connection

** I2 = motore con interruttore/invertitore / motor with side on-off/rotative reverse switch