



**MINIVERTER
MICRO 3/8" F**






**MINIVERTER
MINI 3/4"**





**MINIVERTER
MIDEX 1 1/4"**



Tipo Type	Alimentazione Feeding	kW	Giri/min RPM	H = Prevalenza (metri) / Head (meters)										
				0	4	8	10	12	16	20	24	27	32	
MINIVERTER MICRO 3/8" F	Monofase Single Phase 230V / 50Hz	0.18	min 285	136	130	123	117	108	89	0				Portata (litri/ora) Q = Capacity (liters/hour)
			600	300	287	260	247	227	187	153	80	0		
			900	480	430	390	370	340	280	230	120	0		
			max 1400	720	680	640	620	600	540	470	380	270	0	
MINIVERTER MINI 3/4"	Monofase Single Phase 230V / 50Hz	0.56	min 285	270	195	75	0							
			600	700	560	390	300	150	0					
			900	1000	900	840	750	720	540	350	0			
			max 1400	1620	1440	1320	1230	1140	1020	800	600	400	0	
MINIVERTER MIDEX 1 1/4"	Monofase Single Phase 230V / 50Hz	0.75	min 285	1200	970	800	690	495	0					
			600	2600	2300	2000	1690	1400	800	0				
			900	3840	3480	3180	2990	2760	2160	1600	720	0		
			max 1400	5760	5160	4800	4580	4320	3600	2800	1920	1200	0	

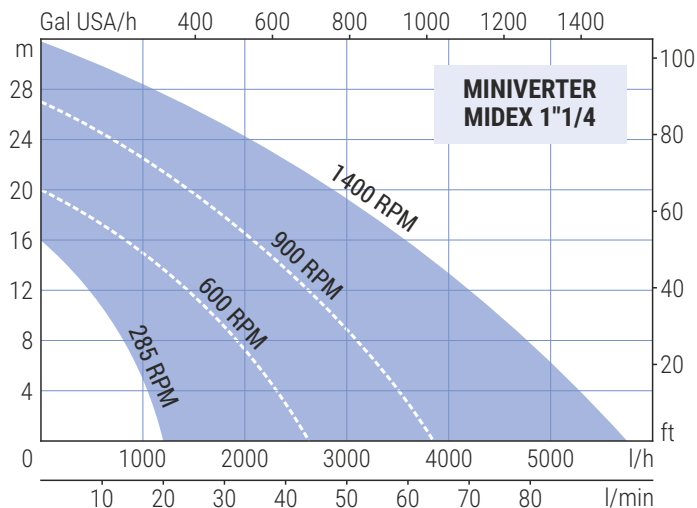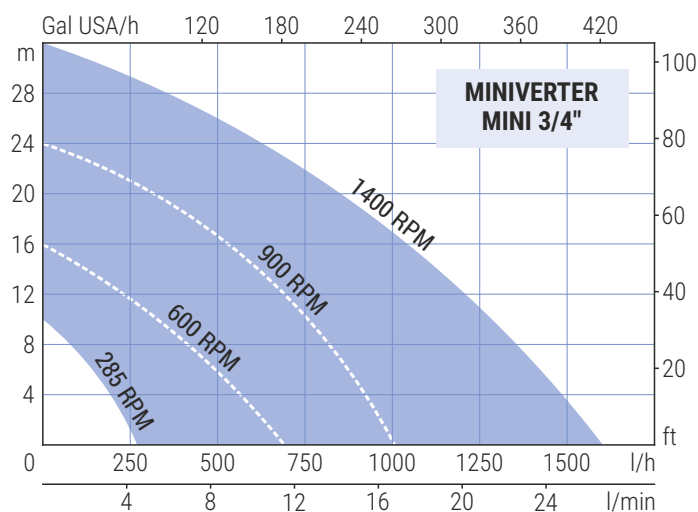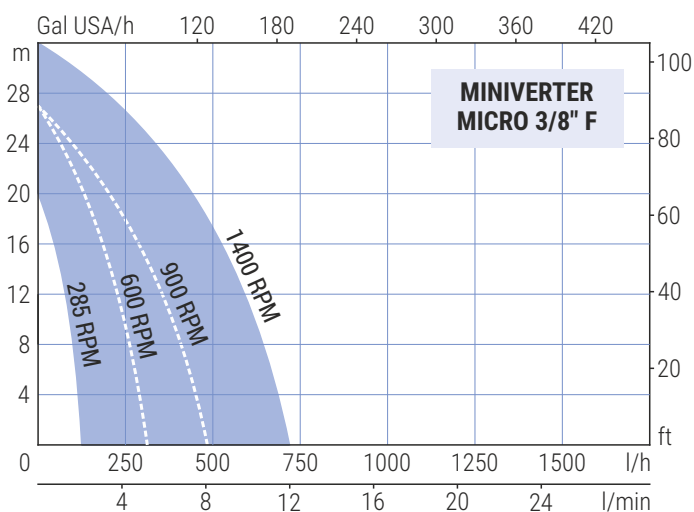



MINIVERTER MICRO 3/8" F

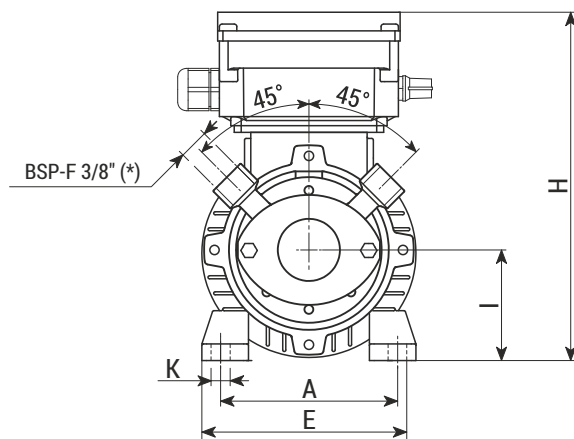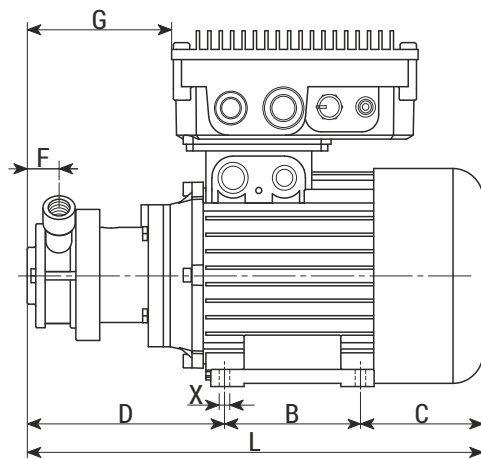

MINIVERTER MINI 3/4"

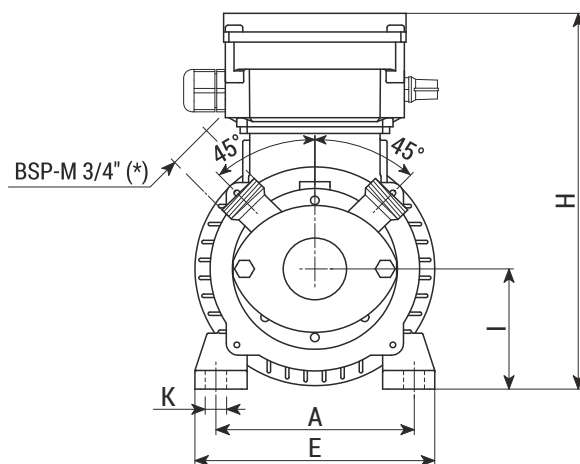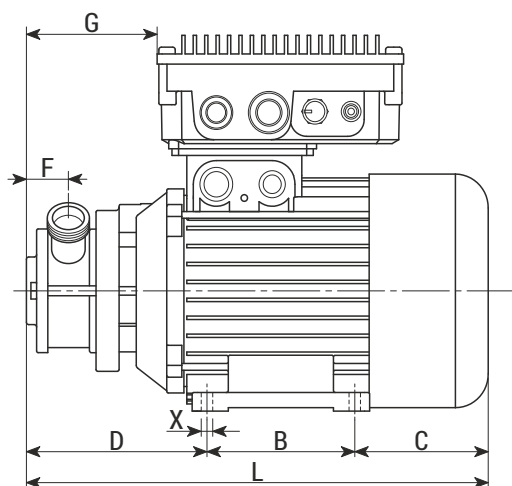

MINIVERTER MIDEX 1"1/4

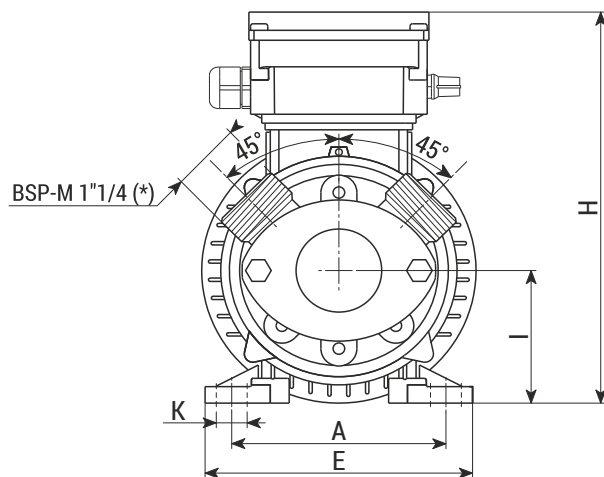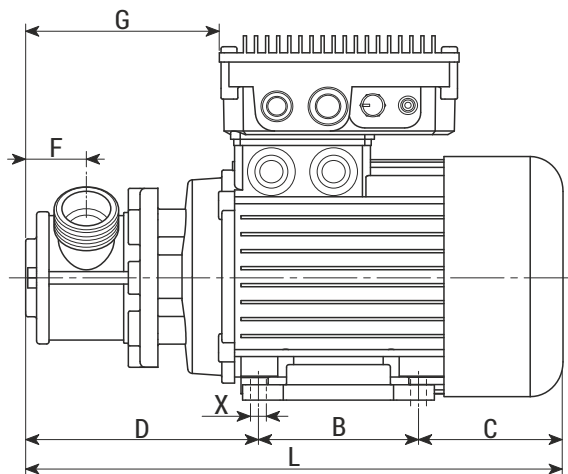

Tipo Type	Motore Motor	Peso Weight	Dimensioni (mm) / Dimensions (mm)											
			A	B	C	D	E	F	G	H	I	L	K	X
MINIVERTER MICRO 3/8" F	M63	7 kg	100	80	66	124	120	19	90	210	63	281	12	7
MINIVERTER MINI 3/4"	M71	10 kg	114	90	81	110	138	26	80	222	71	281	12	7
MINIVERTER MIDEX 1"1/4	M80	16 kg	125	100	90	148	156	39	124	236	80	338	18	10

* raccordi disponibili p.21 / available pipe fittings p.21