

Serie
Type**VA**Serie
Type**INV**

Pompe con variatore o inverter

Pumps with mechanical speed variator or frequency converter



Pompe con variatore (VA)

Pumps with mech. speed variator (VA)



Pompe con inverter (INV)







Pumps with frequency converter (INV)





Tipo Type	Alimentazione * Feeding *		kW	Giri/min RPM	H = Prevalenza (metri) / Head (meters)											
					0	4	8	12	16	18	20	24	27	32	40	
VA MINOR 40	TF	230-400V 50Hz	1.5	min 175	1320	800	0									
				350	2750	2500	2100	1600	800	0						
				700	5000	4700	4300	3700	3000	2520	1800	0				
				max 900	6900	6200	5760	5040	4200	3660	3200	1800	0			
VA MAJOR 60	TF	230-400V 50Hz	1.87	min 175	4320	3840	2800	0								
				350	9000	7800	6000	3700	0							
				700	18000	15000	12000	8400	2500	0						
				max 900	22500	19560	15000	11220	3000	0						
VA MAXI 80	TF	230-400V 50Hz	4	min 150	12000	10000	7500	0								
				300	24600	22200	18900	12000	0							
				470	36000	34200	30000	24000	12000	0						
				max 600	43800	41400	36000	30000	16000	0						
INV MINI 3/4"	MF	TF	0.56	min 180	150	0										
	230V	400V		600	700	560	390	150	0							
	50Hz	50Hz		900	1000	900	840	720	540	450	350	0				
	max 1400	1620		1440	1320	1140	1020	900	800	600	400	0				
INV MIDEX 1"1/4	MF	TF	0.75	min 180	600	480	0									
	230V	400V		600	2600	2300	2000	1400	800	400	0					
	50Hz	50Hz		900	3840	3480	3180	2760	2160	1800	1600	720	0			
	max 1400	5760		5160	4800	4320	3600	3180	2800	1920	1200	0				
INV MINOR 40	MF	TF	1.87	min 50	380	0										
	230V	400V		175	1320	800	0									
	50Hz	50Hz		350	2750	2500	2100	1600	800	0						
	max 900	6900		6200	5760	5040	4200	3660	3200	1800	0					
INV MAJOR 60	MF	TF	2.2	min 50	1230	0										
	230V	400V		175	4320	3840	2800	0								
	50Hz	50Hz		350	9000	7800	6000	3700	0							
	max 900	22500		19560	15000	11220	3000	0								
INV MAXI 80	TF	400V 50Hz	4	min 50	3800	0										
				150	12000	10000	7500	0								
				300	24600	22200	18900	12000	0							
				max 600	43800	41400	36000	30000	16000	0						
INV MAXI Double 2Q-2H	2Q	TF	400V 50Hz	5.5	min 50	7600	0									
					175	27000	24000	20000	13000	0						
					235	36000	33000	27500	20500	10000	0					
					max 470	72000	65000	56000	45000	30000	20000	0				
	2H	TF	400V 50Hz	5.5	min 50	3800	2000	0								
					175	14100	13500	12600	11400	9700	8600	7400	4500	0		
					235	19200	18500	17500	16200	14300	13200	12000	9000	5900	0	
					max 470	27600	26700	25500	24000	22200	21000	20000	17200	14800	9700	0

Q = Portata (litri/ora) / Capacity (liters/hour)



* MF = monofase / single-phase - TF = trifase / three-phase

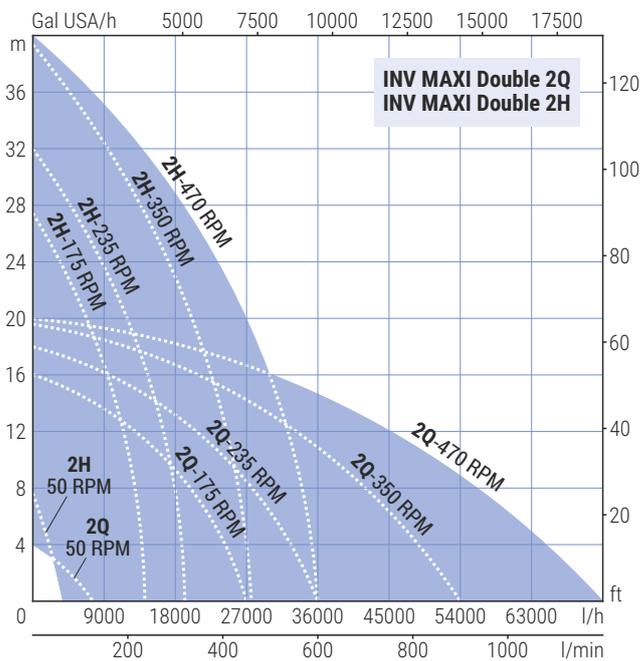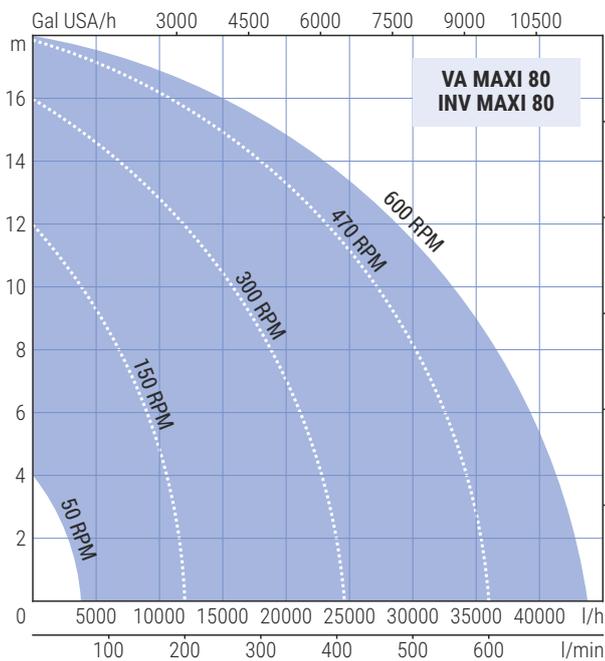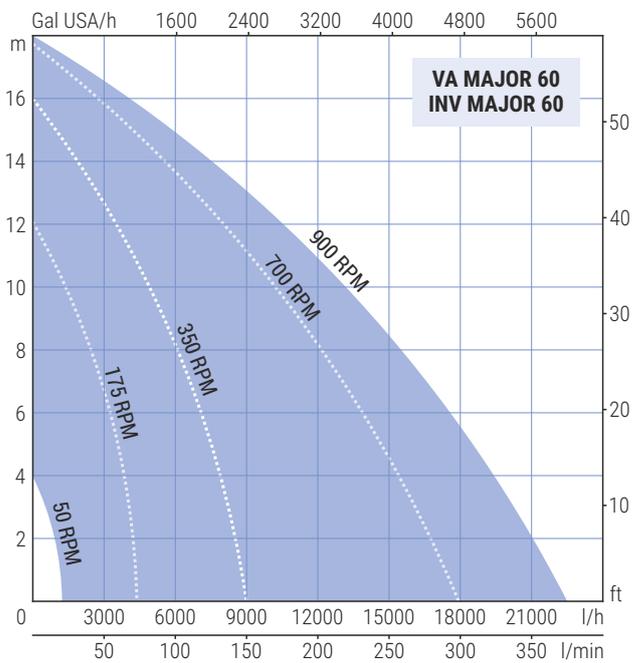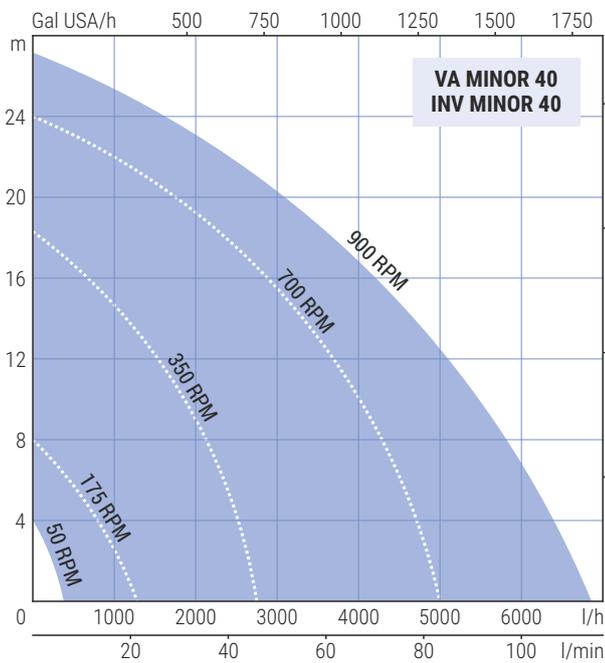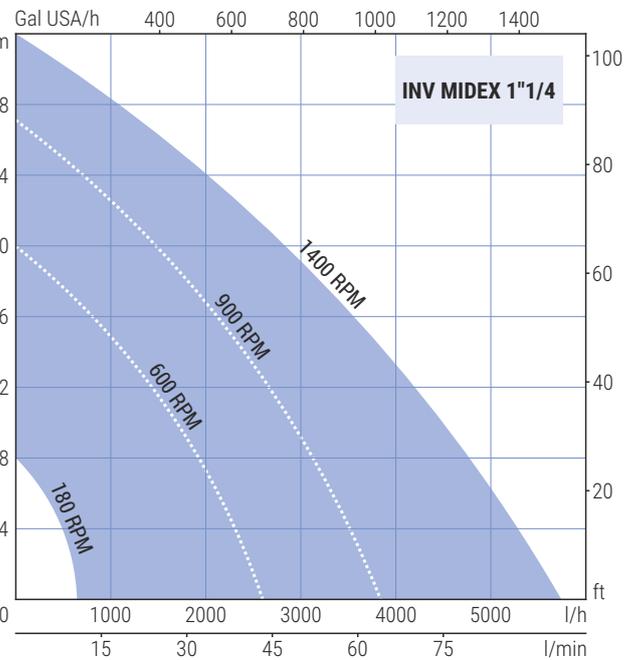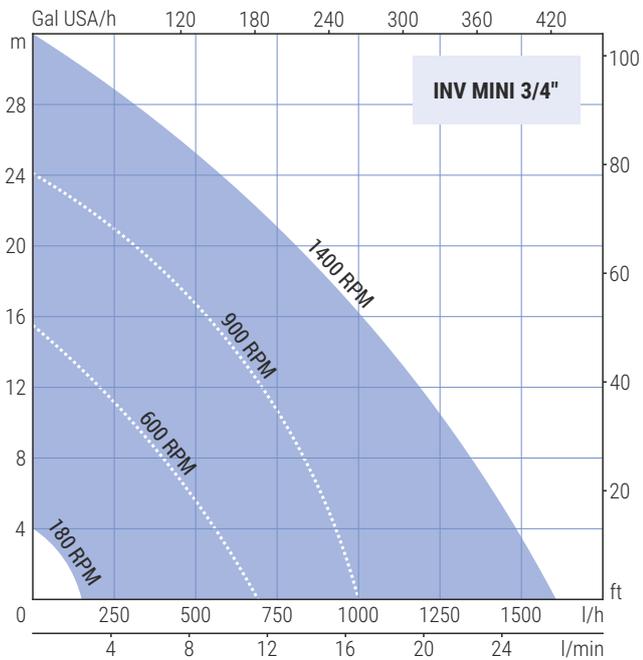



**VA MINOR 40
VA MAJOR 60
VA MAXI 80**

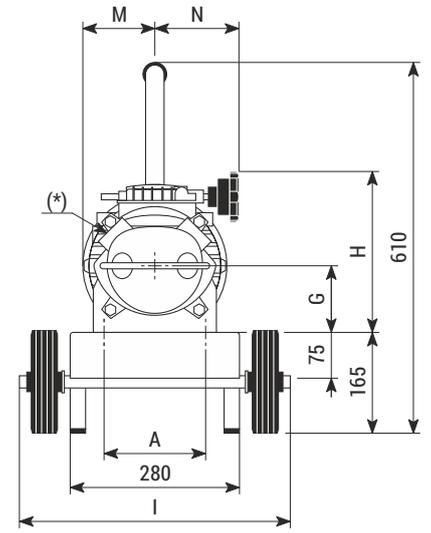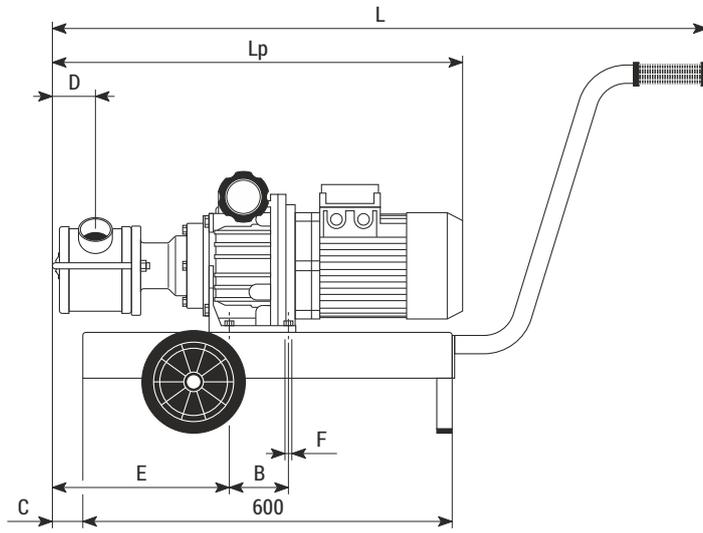

**INV MINI 3/4"
INV MIDEX 1"1/4**

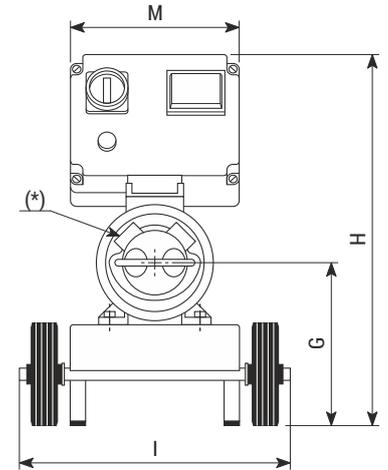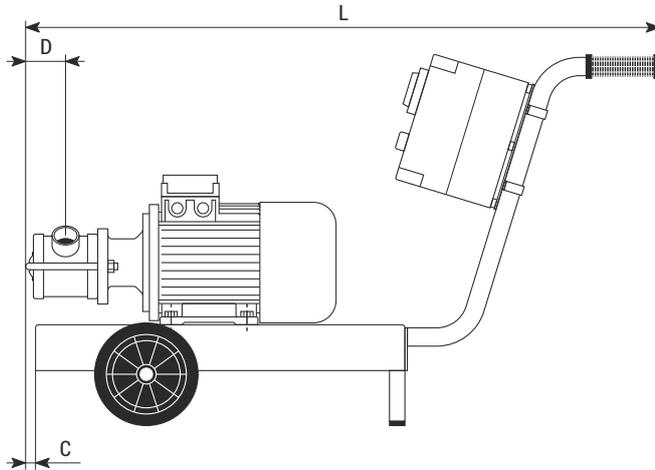

**INV MINOR 40
INV MAJOR 60
INV MAXI 80**

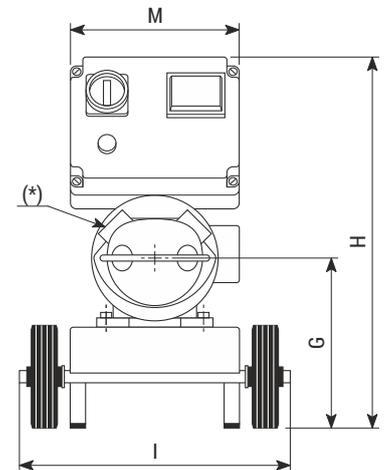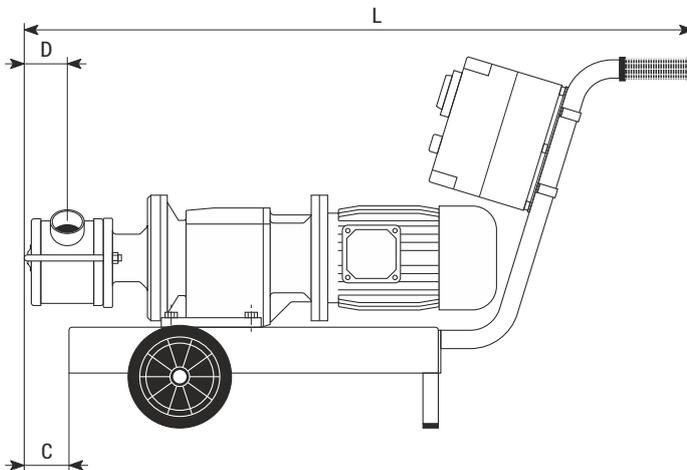

Tipo Type	Peso Weight	Dimensioni (mm) / Dimensions (mm)													
		A	B	C	D	E	F	G	H	I	L	Lp	M	N	
VA MINOR 40	63 kg	164	96	20	60	260	Ø11	109	264	405	1030	640	117	137	
VA MAJOR 60	67 kg	164	96	55	70	295	Ø11	109	264	405	1065	675	117	137	
VA MAXI 80	109 kg	200	120	115	90	305	M12	132	337	405	1125	770	136	172.5	
INV MINI 3/4"	17 kg	-	-	-	26	-	-	175	550	331	790	-	285	-	
INV MIDEX 1"1/4	23 kg	-	-	15	38	-	-	175	550	331	805	-	285	-	
INV MINOR 40	45 kg	-	-	70	60	-	-	268	610	405	1050	-	285	-	
INV MAJOR 60	55 kg	-	-	135	70	-	-	275	610	405	1145	-	285	-	
INV MAXI 80	95 kg	-	-	160	90	-	-	295	610	405	1200	-	285	-	
INV MAXI Double 2Q-2H	180 kg	Dimensioni p.11 / Dimensions p.11													

* raccordi disponibili p.22 / available pipe fittings p.22